

## DELISEP-S1200 - Feeding Station


### TECHNICAL SPECIFICATIONS

Macerator motor	- kW 2,2 (3 hp) - 1430 rpm
Impeller pump motor	- kW 0,75 (1 hp) - 2800 rpm
Pump gear box ratio	- 5:1
Auger motor (only for S1200 unit)	- kW 0,75 (1 hp) - 2800 rpm
Auger gear box ratio (only for S1200 unit)	- 40:1
Electrical supply	- 400 V 50Hz.
Unit capacity up to (mixed food waste)	- 450 kg/h
Water consumption	- 12 l/min at 3 bar *
Noise level	- 73-75 dB (A)
Weight	- 270Kg

\*only for continuous feed units

### INTAKE STATIONS MAIN FEATURES

- PLC control panel with IoT Digital Screen
- Grinding System in stainless steel for long-lasting lifetime
- Back flow protection
- Cutlery magnetic saver
- Stainless steel AISI 304 cabinet & hopper
- Safety switches for operator protection
- Batch feed

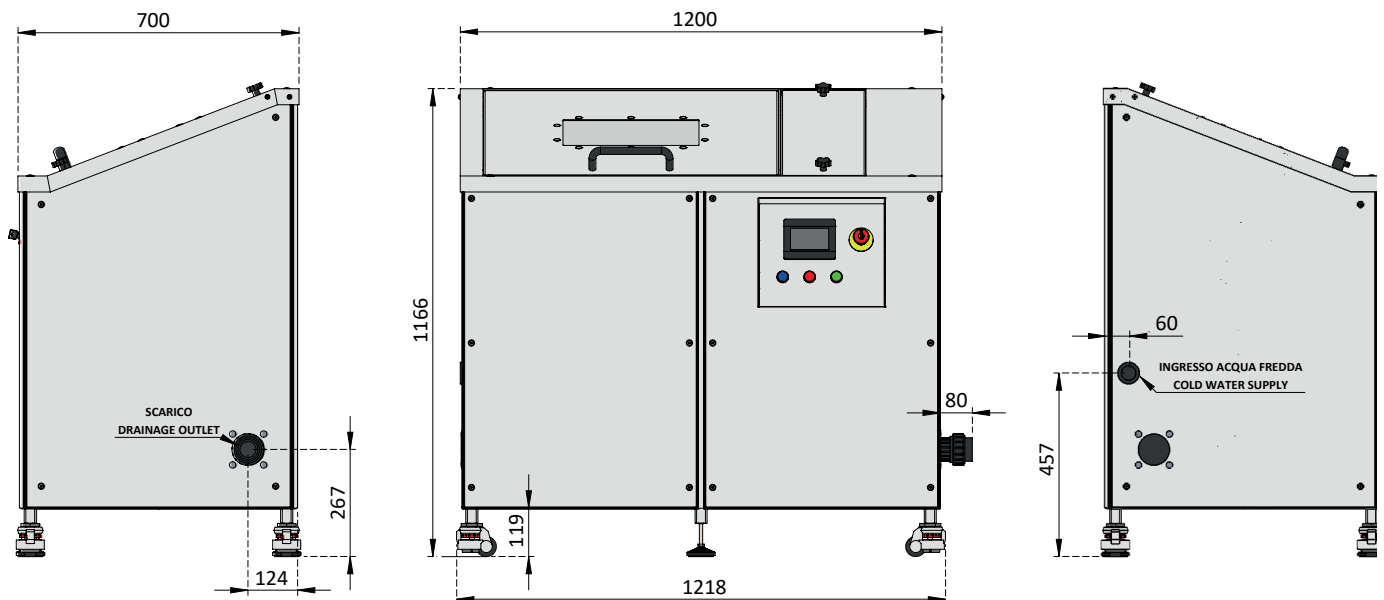

### Delitek AS (Head Office)

Anna Eriksens Vei 31 N-8432 Alsvåg, Norway Tel: +47 76 18 57 60

Fax: +47 76 18 57 60

e-mail: [sales@delitek.no](mailto:sales@delitek.no)

[www.delitek.no](http://www.delitek.no)